

TIS® 800-16-03 The series of products are highly efficient insulating products and they also have thermal conductivity. It achieves the effect of both insulation and heat conduction by adding insulating silicone base material to the heat-conducting material.

Features

- › High thermal conductive and High dielectric strength
- › Low thermal resistance with high voltage isolation
- › Resistant to tears and punctures

Application

- › Car Battery & Power Supply
- › Power semiconductors
- › Audio and Video components
- › Motor controllers

Typical Properties of TIS® 805-16-03

Property	Value	Test method
colour	Yellow	Visual
Construction	Ceramic filled silicone elastomer / Fiberglass	-
Thickness range (inch/mm)	0.005/ 0.127	ASTM D374
Density (g/cc)	2.4	ASTM D297
Tensile Strength (MPa)	12	ASTM D 412
Recommended Operating Temperature (° C)	-60~180	-
Breakdown Voltage (V/mm)	3000	ASTM D149
Dielectric Constant @1000Hz	6.0	ASTM D150
Volume Resistivity (Ohm-cm)	1x10 ¹²	ASTM D257
Thermal Conductivity (W/mK)	1.6	ASTM D5470
	1.6	ISO22007-2.2
Thermal impedance (°C·in ² /W) @30psi	0.5	ASTM D5470
Flame Rating	V-0	UL94 (E331100)

Product Specification

Standard thickness: 0.005inch(0.127mm).


Standard size:

12" * 160' (304 mm * 48.76 m).

The TIS series can be die-cut into different shapes and provided. If you need different thicknesses, please contact our company.

Product Identifier

TIS8 05 - 16- 03

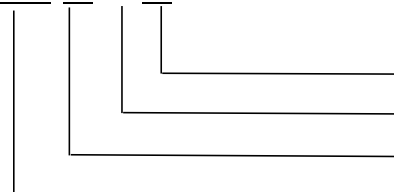

colour: 03 (Yellow)

Thermal conductivity: 1.6 W/mK

Thickness: 0.005 inch (0.127mm)

Product series

Global solutions:Local support

China:+86-769-38901208
Taiwan:+886-2-2277-1007
Canada:+001-604-2998559
Vietnam:+84-396852859

service@ziitek.com

www.ziitek.com

Ziitek Technology Ltd and its distributors provide information deemed accurate and reliable. However, product specifications may be adjusted due to technical modifications or optimizations without prior notice. The responsibility for product use and application lies with the end user. Ziitek makes no guarantees regarding the product's suitability, merchantability, or fitness for a particular purpose and assumes no liability for incidental or consequential damages. Ziitek and its logo are the property of the company or its affiliates.



TIS800-16-03--0425